



Energy
SAVERS
LOW-H₂O



jaga



TEMPO FREESTANDING
The most powerful heat emitters for
condensing boilers and heat pumps

WWW.JAGA-USA.COM
WWW.JAGA-CANADA.COM






WARM POWER, BASIC STYLE

Tempo is a pioneer when it comes to energy saving. A classic, but most certainly not old-fashioned. Its horizontally lined front panel continues to be contemporary and universal. Tempo is light, fast, accurate and can be perfectly regulated. Its familiar look makes it a welcome addition to any interior.

DIMENSIONS

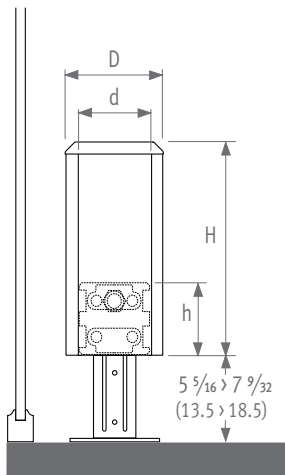

Tempo Freestanding is available in lengths from 15.5" (40) to 118" (300).

OUTPUT

Type	d	h	D	H 8	12	15.5	19.5
				(20)	(30)	(40)	(50)
10	4 (10)	4 (10)	4 41/64 (11.8)	655	826	963	1076
11	4 (10)	8 (20)	4 41/64 (11.8)	---	1121	1264	1386
15	6 (15)	4 (10)	6 39/64 (16.8)	1090	1359	1568	1734
16	6 (15)	8 (20)	6 39/64 (16.8)	---	1480	1700	1898
20	8 (20)	4 (10)	8 37/64 (21.8)	1532	1906	2196	2425
21	8 (20)	8 (20)	8 37/64 (21.8)	---	1948	2274	2582

Average output in BTU/h foot with 65°F (18.3°C) entering air and 1 GPM flow rate. Mean water temperature of 160°F (71.1°C).

THE MOST POWERFUL HEAT EMITTERS



Significant energy savings

The most efficient and modern fin tube element, that complies with actual AND future building standards and technologies.

For all low temperature hydronic systems

Perfectly suited for condensing boilers, heat pumps and solar systems.

The perfect partner for radiant heating

for improved temperature control and energy efficiency.



1/8" NPTF airvent connection

Brass collectors with 1/2" NPTF connections

With dirt-repellent and dust-proof lacquer in graphite grey

Up to 16 parallel copper tubes for the best heat emission

55 Corrugated aluminum fins per foot for super heat-output at low water temperatures

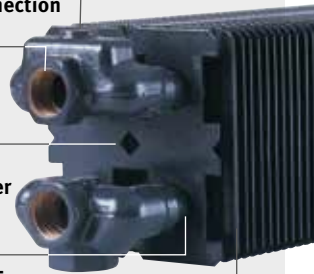

Note: dimensions in "()" are shown in centimeters.

